

4-FUSS

FREE OF PVC

Application:

Robust spacer with large clamping zone for middle and heavy reinforcement. Ideal of application of the pre-cast industry and on the construction site.

Installation:

The 4-foot spacer are fixed at the intersections of the reinforcement. Additional information about the location and the installation spacing are contained in the DBV-data sheet.

Material:


- Polyolefin (PO)
- Free of PVC, CFC, HFC
- Without substances of very high concern according to the candidate list of ECHA (REACH Regulation)

Packaging:

Free of halogen-containing compounds, azo dyes, flame retardants

Order information:

Item-No.	Concrete cover mm	For iron Ø mm	Pcs/ Bag	Pcs/ Big bag	Pcs/ Pallet
ATV...20	20	6-20	500	2.000	12.000
ATV...25	25	6-20	500	1.500	12.000
ATV...30	30	6-20	250	1.500	12.000
ATV...35	35	6-20	250	1.000	10.000
ATV...40	40	6-20	250	1.000	10.000
ATV...45	45	6-20	250	1.000	8.000
ATV...50	50	6-20	125	500	7.500
ATV...55	55	6-20	125	500	7.500

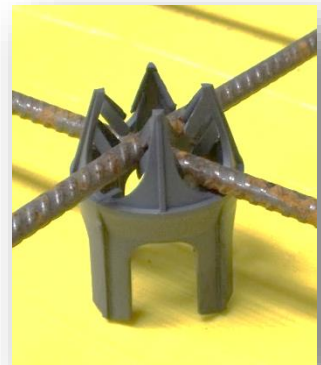

ATVF... - with flat foot spikes



ATVS... - with pointed foot spikes

Important:

The choice and use of spacers is regulated, amongst others, in:

- DIN1045
- Data sheet of German Society for Concrete and Construction Technology: "Spacers", "Support", "Concrete cover and reinforcement"

INFORMATION:

The information given is the best that Nevoga researched and prepared at this time. The instruction sheets are recommendations. Correct use is the responsibility of the user. Nevoga does not guarantee the accuracy and completeness of the information. All rights for changes, mistakes, sentence and printing errors reserved. Reprint only with written permission of Nevoga.